

## CA9312MH

PROOFER FOR SQUERO OVENS  
12 TRAYS 600 x 400 - GN 1/1  
MECHANICAL CONTROL + HUMIDITY

### FUNCTIONAL CHARACTERISTICS

Overlapping oven	SQ04* - SQ05* - SQ06* - SQ07* - SQ10* - SQ12* SQ04A* - SQ05A* - SQ06A* - SQ07A* - SQ10A* - SQ12A*
Display	Analogic
Supply	Electric
Timer	-
Max proofing temperature	60°C
Core probe	-
Cooking chamber material	AISI430
Opening door	Double door
<b>STANDARDS</b>	
Certification	CE



## TRAYS

Trays rack	Sheet PA-BIV 6/75 mm
Max tray load	4kg

## DIMENSIONS

Size with handle WxDxH	935 x 893 x 706 mm
Chamber size WxDxH	817 x 826 x 621 mm
Unit weight	50kg

## PACKAGING

Packaging	Pallet + carton box
Packaging size WxDxH	975 x 945 x 832 mm
Unit weight with packaging	65kg
Crate packaging size (optional)	-

## ELECTRICAL DATA

Power	2,4kW
Frequency	50/60Hz
Power supply	220-240V 1N~
Amperage	10,5A
Power cord req.	3G1,5

## WATER CONNECTION REQUIREMENTS

Humidification Water Inlet	Male 3/4" M Gas threaded
Water drain	-
Max water hardness	5°f
Water pressure requirement min-max	150-200 kPa




## CONNECTIVITY

USB	-
Bluetooth	-
Wi-Fi	-
Cloud	-

## ACCESSORIES

Reinforced base kit	85KIT00028
Water softner cover	WS10
Water softner 6800l	WS11
Water softner 12000l	WS12
Water pressure adapter	WPA



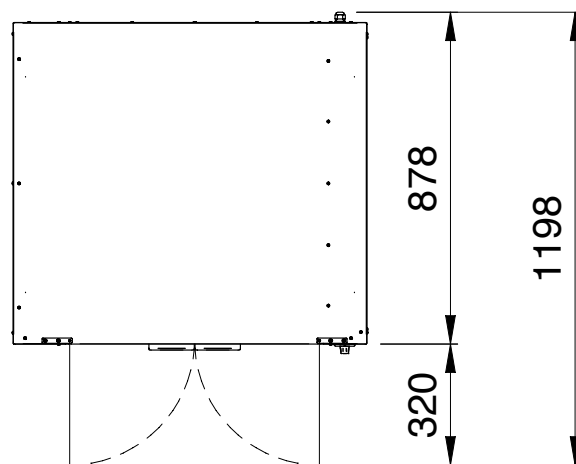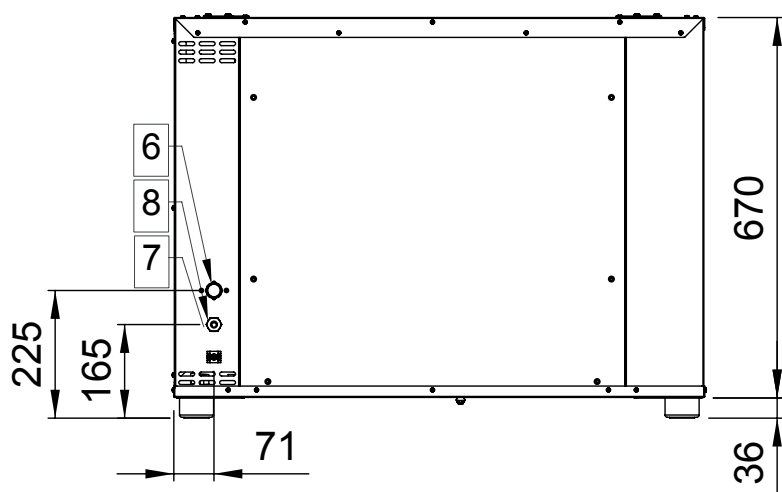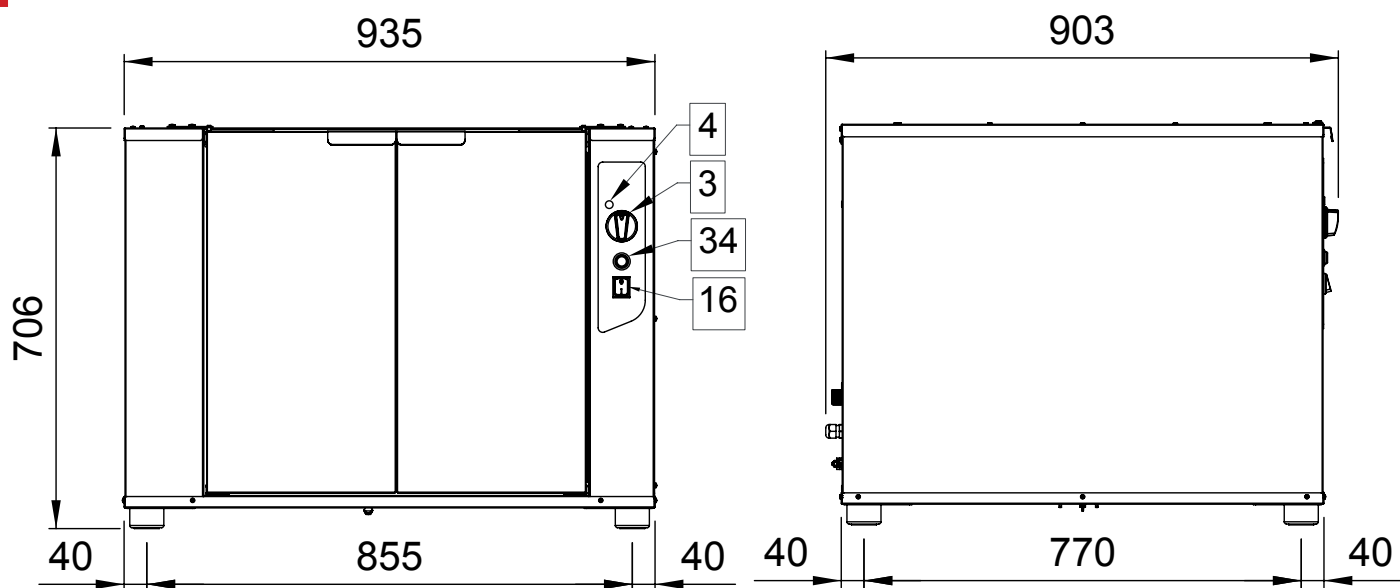

03.	TEMPERATURE SELECTOR
04.	LIGHT ON/OFF HEATING ELEMENT
06.	HUMIDIFICATION SOLENOID VALVE 3/4" BSP (GAS)

07.	UNIPOENTIAL TERMINAL
08.	COMPRESSION CABLE GLAND
16.	ON/OFF
34.	WATER INJECTION REGULATION

