



SPZLR0AER00 BLACK

HIGH - SPEED CONVECTION OVEN
2,4" DIGITAL LCD CONTROL

FUNCTIONAL CHARACTERISTICS

Display	Digital
Supply	Electric
Timer	-
Number of motors	1
Motor speeds	5 speed + inverter
Max cooking temperature	260°C
Probe	Single point PT1000
Cooking chamber material	AISI304
Opening door	Flap door
Chimney	20mm open
Humidification	-
Air injection	-
Version	Standard
Venteless	-



STANDARDS	
Certification	CE
TRAYS	
Trays rack	Sheet metal single level
Max tray load	3kg
Pizza paddle	SPZFLA (optional)
Panini paddle	SPZSHO (optional)
Pizza tray	85GRI00327 (optional)
Perforated pizza pan	85GRI00406 (Optional)
Panini grid	85GRI00310 (optional)
Crumbs tray	85VAS00080 (included)
Teflon sheet 270 x 270 mm	50GPP00086 (optional)
Teflon tray 305 x 305 x 24 mm	50GPP00087 (optional)
DIMENSIONS	
Oven size with handle WxDxH	460 x 655 x 525 mm
Oven size without handle WxDxH	460 x 610 x 525 mm
Chamber size WxDxH	320 x 315 x 215 mm
Unit weight	36kg
PACKAGING	
Packaging	Carton box
Packaging size WxDxH	540 x 700 x 675 mm
Unit weight with packaging	48,4kg
Crate packaging size (optional)	510 x 720 x 670 mm
Unit weight with crate packaging (optional)	61,8kg
ELECTRICAL DATA	
HEATERS 3,1kW 50/60Hz	
Power	3,4kW
Frequency	50/60Hz
Power supply	220-240V ~
Amperage	14,8A
Power cord req.	3G1,5



WATER CONNECTION REQUIREMENTS

Humidification Water Inlet	-
Washing Water Inlet	-
Water drain	-
Max water hardness	-
Water pressure requirement min-max	-

CONSUMPTION

Humidification Water with solenoid valve	-
Humidification Water with pump	-
Rinse Water @2barG	-
Short Washing Water @2barG	-
Long Washing Water @2barG	-
Short Washing Detergent *	-
Long Washing Detergent *	-



CONNECTIVITY

USB	USB 2.0
Bluetooth	-
Wi-Fi	Standard
Cloud	Standard

ACCESSORIES

Pizza paddle	-
Panini paddle	-
Pizza grid	-
Panini grid	-
Teflon sheet 270 x 270 mm	-
Teflon tray 305 x 305 x 24 mm	-
Hood	POSPZ*
Detergent	DT1



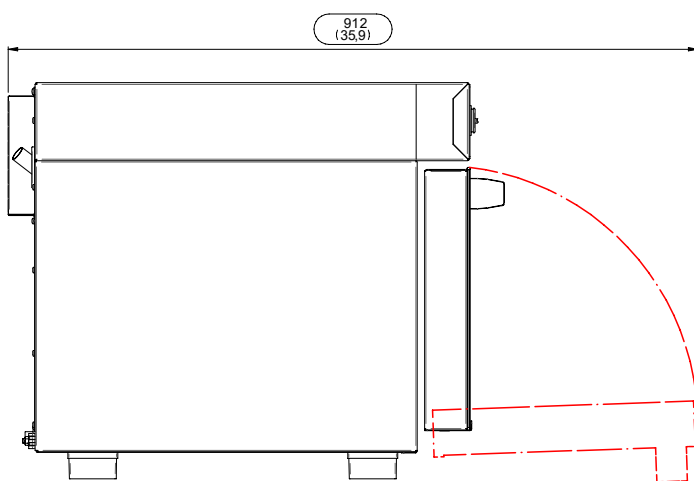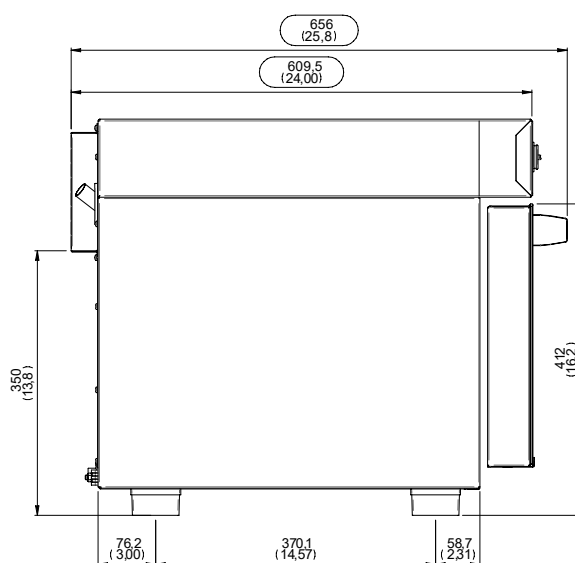

10.	DIGITAL CONTROL
20.	USB CONNECTION
33.	SAFETY THERMOSTAT

